

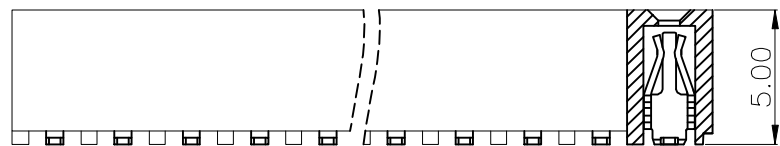


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	NEW	JASON	11.18.2019

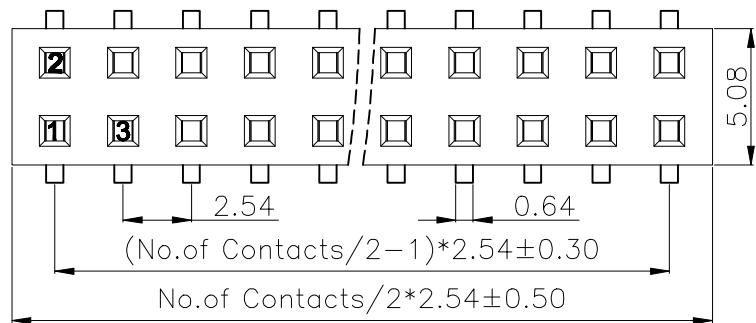


NOTE:

- MATERIAL:  
HOUSING: THERMOPLASTIC, HIGH TEMP, 30% G/F  
UL 94V-0, COLOR: BLACK.  
CONTACT: PHOSPHOR BRONZE OR BRASS.
- FINISH:  
CONTACT: AU PLATING OVER NI(50μm MIN.)
- ELECTRICAL:  
CONTACT RESISTANCE: 20mΩ Max.  
INSULATION RESISTANCE: 1000MΩ Min.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC  
CURRENT RATING: 3A
- ENVIRONMENTAL:  
OPERATING TEMPERATURE: -25°C TO +85°C  
COMPLIANCE: RoHS

WFH-8001-2XX-2 G X B- X R-XX

- 202-04PIN
- 215-30PIN
- 240-80PIN
- 2-VERTICAL SMT
- G-GOLD FLASH
- 3-15u"
- 4-30u"
- C-LCP
- P-PBT
- 1-NY6T
- 01-CANCEL 01PIN
- 08-CANCEL 08PIN
- 16-CANCEL 16PIN
- R-RoHS
- H-HF
- G-GP
- B-BAG
- R-TAPE REEL
- 1-TUBE
- T-TRAY
- B-BLACK
- R-RED
- Y-YELLOW

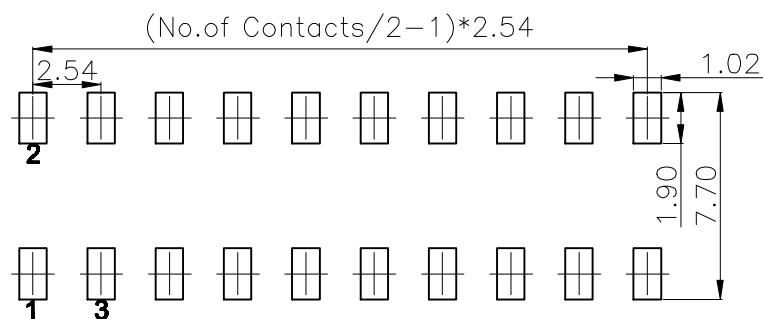

TOLERANCE: ±0.05  
RECOMMENDED PCB LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCES		<b>WCONN</b> Wconn Electronic Technology (SuZhou) Co., Ltd.	
DECIMALS:	ANGLES:	TITLE	FEMALE HEADER 2.54mm VERTICAL SMT TYPE H=5.0
X : ±0.5	X : ±5°	DWN	PART NO. WFH-8001-2XX-2GXB-XR
X.X : ±0.38	X.X : ±3°	CHKD	SCALE 1:1 UNIT: mm
X.XX : ±0.25		APVD	SIZE: A4 SHEET: 10F1 REV: A
X.XXX : ±0.15		CUSTOMER COPY	